




Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/IB 03/04220

22.09.03



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079337.8

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02079337.8
Demande no:

Anmeldetag:
Date of filing: 18.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Data converter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H03M3/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Data converter

EPO -
18.10.2002
(108)

The invention relates to a data converter comprising a sigma delta modulator intended to operate at a specific sample frequency, said sigma delta modulator comprising in a feedback loop a comparator, a time-discrete low pass filter and a quantizer in that order, in which the comparator is arranged to compare the output of the quantizer with the input signal
5 to be converted. Such data converter is known from the article "Digital Power Amplification Using Sigma-Delta Modulation and Bit Flipping" by A.J. Margrath and M.B. Sandler in J. Audio Engineering Society, Vol. 45, No 6, pp 476-487, June 1997.

The invention is particularly but not exclusively of interest to drive switching power amplifiers (class D amplifiers). These amplifiers are used for instance in motor
10 drivers, supply regulators and audio amplifiers. Conventional class D amplifiers use analog pulse width modulators. However there is a need for digital pulse width modulators since nowadays signals are often available and processed in the digital domain. But the problem is, that digital pulse width modulators in which a direct translation of signal amplitudes into pulses with proportional width takes place, suffer from considerable signal distortion
15 originating from the sampler. It is possible to reduce this distortion by using very high sample frequencies, however this has the drawback that quite complex and expensive circuits are required.

The approach followed in the abovementioned article is to translate the digital PCM input signals into a pulse density modulated signal by means of a sigma delta
20 modulator. Subsequently, the output pulses of the sigma delta modulator are used to switch the power-amplifier, which operates as a 1-bit D/A converter, and the output of the power-amplifier is applied to low pass filtering means constituted wholly or partly by the load of the power amplifier. However, the problem with conventional sigma delta modulators is that the pulse density modulated signal has much higher switching frequencies than pulse width
25 modulated signals. This limits their usability, especially in power converters, because the power losses in class D amplifiers increase proportional with the number of switching flanks. In the aforementioned article a method is proposed that uses a separate controller around the sigma delta modulator to force the sigma delta modulator to generate low frequency pulse

patterns. This method is called "bit flipping" and it leads to quite promising results, but with the drawback of increased circuit complexity.

The present invention has the object to force the sigma delta modulator to generate low frequency pulse patterns with much lower circuit complexity than the solution

5 of the said article, while there is a large flexibility in the choice of the average length of these pulse patterns and the data converter according to the present invention is therefore characterized in that, for decreasing the idle oscillation frequency of the sigma delta modulator, the time-discrete low pass filter is arranged to have a 180° phase delay with positive group delay at a frequency that is at least four times lower than the sample frequency
10 (f_s). The group delay is normally defined as the negative of the slope of the phase versus frequency characteristic. Therefore this means that according to the invention the phase versus frequency characteristic passes with increasing frequency downwardly through a 180° level at a frequency that is at least four times lower than the sample frequency (f_s).

Theoretically, each sigma delta modulator generates an oscillation pattern,
15 often called "limit cycle". An analog sigma delta modulator with a single integrator followed by a comparator would in theory start to oscillate at an infinite frequency and the average output signal would be equal to the input signal. An equivalent digital sigma delta modulator with zero input signal would start to oscillate around half the sample frequency because of the inherent time delay of the time-discrete integrator. The idea behind the present invention
20 is that, by properly dimensioning the time-discrete low pass filter, the sigma delta modulator may be forced to oscillate at a frequency which is substantially lower than is the case with prior art sigma delta modulators without "bit flipping" and that this reduction in oscillator frequency leads to broader pulse patterns and correspondingly lesser switching flanks in the output of the sigma delta modulator.

25 For instance, in a sigma delta modulator for audio signals with a standard CD-audio sample rate of 44.1 KHz which is firstly upsampled to a sample rate f_s of $256 \times 44,1$ KHz, the average oscillation frequency may be reduced from $f_s/2 = 128 \times 44.1$ KHz to about 8×44.1 KHz, i.e. by a factor 16. The embodiment to be described afterwards in this application is based on these frequency-figures.

30 The most important advantage of a data converter according to the present invention is the much lower switching frequency with the corresponding reduction in energy dissipation, especially when the converter is used to drive a class D power amplifier.

Moreover, the lower switching frequency makes the data converter of the present invention less sensitive to the most important problems associated with 1-bit converters, namely Inter

Symbol Interference (ISI) and clock jitter. The average width of the pulses is much larger than for prior art 1-bit converters, thus the relative variance of the pulse-widths due to differences in the switching moments is smaller. Furthermore the switching frequency of the proposed data converter is more stable i.e. less dependent of the input signal, than the switching frequency of conventional data converters. Therefore the analog back-end behind the data converter of the present invention will generate less harmonic distortion. With the present invention most switching inaccuracies will lead to an increase of the noise floor and much less to an increase of the harmonic distortion.

A preferred embodiment of the data converter according to the present invention is characterized in that the transfer function of the time-discrete low pass filter comprises, in its complex z -plane, a plurality of poles at or close to the point $(1;0)$ of the unit circle of said plane and an additional pole on the positive real axis of said plane at a value between 0,20 and 0,92 for decreasing the idle oscillation frequency of the sigma delta modulator. Said plurality of poles may be positioned in known manner so that a suitable low frequency pass band, e.g. with Butterworth or Chebyshev characteristic, and a sufficiently steep roll off is obtained. These poles operate mainly in the base band of the signals to be converted and substantially contribute to the noise shaping, i.e. the reduction of the noise power in the said base band. The additional pole on the real axis is mainly operative in the higher frequency band and determines the average frequency at which the loop will oscillate i.e. the average length of the pulse patterns. In the example given below this pole is positioned at the point $(0,88;0)$ of the complex z -plane. Positioning the additional pole further away from the point $(1;0)$ would increase the oscillator frequency, i.e. the more the additional pole is away from the point $(1,0)$ the less influence the pole has on the pulse pattern. If it is desired to further decrease the oscillator frequency the pole has to be positioned closer to the point $(1,0)$, however any further shift beyond approximately 0,92 would bring the pole too close to the point $(1;0)$ and would cause the pole to loose any control over the oscillation pattern.

Preferably the DA-converter of the present invention is further characterized in that the transfer function of the time-discrete low pass filter has a number of poles that exceeds the number of zeros of said time-discrete low pass filter by at least 2. Because usually in a digital sigma delta modulator the number of poles exceeds the number of zeros by one, this means that the additional pole is introduced without the introduction of an additional zero. The position of the zeros is a compromise between the stability requirements and the noise shaping requirements of the sigma delta modulator and this compromise is best

preserved when the higher order characteristic at the lower frequencies is followed by a first order characteristic at the intermediate frequencies. By adding the additional pole without introducing an additional zero, a second order characteristic in the frequency range above said intermediate frequencies is obtained while the first order characteristic for the

5 intermediate frequencies is preserved. However, in some cases, it is possible to place an additional zero somewhere on the real axis to change the phase characteristic of the filter and thereby the oscillation frequency, without a significant alteration of the noise shaping characteristics.

A suitable data converter according to the invention may be characterized in
10 that the time-discrete low pass filter comprises a cascade of integrators, summing means to sum the output of said integrators through coefficient multipliers to constitute the output of the time-discrete low pass filter and a single order low pass filter section positioned in series with the first of the integrators of said cascade for producing said additional pole on the real axis of the complex z-plane. The low pass filter section may be placed either before or after
15 the first of the integrators but, if the addition of a zero should be avoided, before the first tap to the summing means. It has to be remarked that alternatively the low pass filter section may be placed in the output of the summing means. It may also be remarked that, without departing from the scope of the invention, some or all of the zeros may be made by feeding back the output of the quantizer to one or more points in the time-discrete low pass filter.

20 It may further be observed that the data converter of the present invention is not restricted to converting digital PCM data to single bit digital data, but may also be arranged to convert analog data to single bit digital data. Such converter may e.g. comprise a single bit D/A converter to convert the output of the quantizer to analog pulses for application to the (analog) comparator and a sampler to sample the analog output of the
25 comparator and to supply the analog samples so obtained to the time-discrete low pass filter.

The invention will now be described with reference to the accompanying drawings. Herein shows:

30 Fig. 1 a schematic diagram of an embodiment of a data converter according to the present invention,

Fig. 2 amplitude versus frequency diagrams of the transfer function of the digital low pass filter used in the embodiment of Fig. 2. and

Fig. 3 phase versus frequency diagrams of the transfer function of the digital low pass filter used in the embodiment of Fig. 2.

5 The data converter of Fig. 1 comprises a digital low pass filter FD that receives at its input terminal a digital input signal U, e.g. a digital PCM-signal, through a comparator G that might be a simple subtracter. The output signal V of the digital low pass filter is quantized in a one-bit quantizer Q and the output W of the quantizer is fed back to the comparator G. Therefore the comparator subtracts the quantizer-output W from the input
10 signal U, the difference signal U-W is passed to the digital low pass filter FD and the low-frequency content of this difference signal U-W is applied to the quantizer. The output of the quantizer is a series of one-bit pulses, which may, with respect to a reference value, have either +1 or -1 value. The structure of comparator G, digital low pass filter FD and quantizer Q constitutes a time-discrete sigma delta modulator which keeps the difference between the
15 value of the PCM input signal and the low frequency content of the pulses W as small as possible. Therefore, when the input signal value increases, the number of +1 pulses in the output of the quantizer increases and the number of -1 pulses decreases. Equally, when the value of the input signal decreases, the number of +1 pulses in the quantizer-output decreases and the number of -1 pulses increases. Where the digital input signal U of the sigma delta
20 modulator comprises bits whose value is dependent on the position of the bits, i.e. more significant bits and less significant bits, the digital output pulses W all have the same significance. In contrast to the digital input signal, the digital output signal of the sigma delta modulator has a low frequency content which substantially matches the analog signal content and this analog signal content can therefore be recovered by a suitable single bit DA
25 converter followed by an analog low pass filter. In practice the single bit DA converter may contain a switched power amplifier (class D amplifier) and the analog low pass filter may comprise one or more loudspeakers.

 The total power of the output signal W of the sigma delta modulator is substantially higher than the power of the base band signal, which means that a certain
30 frequency band outside the signal band has to be used to distribute the remaining output power (the noise power). In order to sufficiently shape this noise power to the remaining frequency band the digital low pass filter of the sigma delta modulator has to be of sufficiently high order. In the arrangement of Fig. 1 the digital low pass filter FD comprises six integrators I_1 to I_6 in cascade. Each of the integrators has a z-transfer $1/(z-1)$. The

integrators I_1 and I_2 each constitute a pole in point $(1;0)$ on the unit circle of the complex z -plane. The integrators I_3 and I_4 would also constitute two poles in point $(1;0)$ however the output of the integrator I_4 is, through a multiplier A_1 , subtracted from the input of integrator I_3 by means of a subtractor S_1 and this measure causes an upward shift of one of the two

poles and a downward shift of the other of the two poles to obtain conjugate poles in the points $(1; \pm \sqrt{A_1})$. In the same way the integrators I_5 and I_6 have a multiplier A_2 and a subtractor S_2 in the input lead to the integrator I_5 in order to create two conjugate poles in the points $(1; \pm \sqrt{A_2})$.

The outputs of the six integrators I_1 to I_6 are each connected to a coefficient-multiplier C_1 to C_6 respectively and the outputs of these coefficient-multipliers are summed in a summer AD to constitute the output V of the digital low pass filter FD. As is well known this structure creates a number of zeros in the transfer function of the digital low pass filter. The six coefficient-multipliers of Fig. 1 create five zeros whose positions in the complex z -plane may be chosen by proper choice of the coefficients C_1 to C_6 . The six poles lay on or very close near the point $(1;0)$ of the complex z -plane and are so distributed that they guarantee a sufficient signal to noise ratio over the entire pass band and a sufficiently steep edge in the transfer characteristic above the pass band. The five zeros are located to obtain optimal stability at high input signal values and optimal shaping of the sample noise into the higher frequency band.

The arrangement of Fig. 1 further comprises a low pass filter section L positioned between the input terminal of the digital low pass filter FD and the integrator I_1 . The low pass filter section L has a transfer function $1/(z-B)$ and may e.g. be implemented by an adder followed by a sample-delay, with the output of the delay being fed, through a multiplier with factor B , back to the adder. An integrator whose output is multiplied by $1-B$ and then subtracted from its input may also implement it. The low pass filter section L generates an additional pole on the horizontal axis of the complex z -plane at position $(B;0)$. The section L may also be positioned behind the integrator I_1 , but preferably before the tap to coefficient-multiplier C_1 , so that the section L does not create an additional zero. With the section L the low pass filter FD is of 7th order with seven poles and five zeros. The position of the poles and zeros of an arrangement tested in practice is listed in the following table:

	Real part	Imaginary part
Pole 1	1	0
Pole 2	1	0
Pole 3	1	0,0107
Pole 4	1	-0,0107
Pole 5	1	0,0075
Pole 6	1	-0,0075
Pole 7	0,88	0
Zero 1	0,9933	0,0198
Zero 2	0,9933	-0,0198
Zero 3	0,9836	0,0121
Zero 4	0,9836	-0,0121
Zero 5	0,9805	0

The integrators I_3 , I_4 and the multiplier A_1 with coefficient $A_1 = 0,00011449$ create the two conjugate poles 3 and 4. Equally the integrators I_5 , I_6 and the multiplier A_2 with coefficient $A_2 = 0,00005625$ create the two conjugate poles 5 and 6. Poles 1 and 2 are created by the integrators I_1 and I_2 respectively and pole 7 is created by the low pass filter section L with $B = 0,88$. It may be observed that the poles 1 to 6 are all located at or in the neighborhood of the point (1;0) of the complex z-plane. This means that these six poles have their main influence on the frequencies below $0,01 * f_s/2$ i.e. the frequencies of and close to the audio base band. In contradistinction herewith the additional pole 7 is located substantially more remote from the point (1;0) and therefore its influence is mainly on the frequencies from $0,01 * f_s/2$ to $1 * f_s/2$. With $f_s = 256*44,1$ KHz the six poles are mainly operative under 56,5 KHz while the pole 7 is mainly operative in the frequency region between 56,5 KHz and 5650 KHz. The five zeros are preferably located as far as possible remote from the point (1;0) in order to improve the noise shaping, however this is limited by the stability requirements. In the example given above the zeros are located so that the turnover point between the higher (sixth) order transfer and the lower (first) order transfer is at about 80 KHz.

From the above given locations of the poles 2 to 6 and the zeros 1 to 5 the coefficients C_1 to C_6 may be calculated. This can be done by firstly calculating the coefficients C_5 and C_6 at the locations of the poles 5 and 6, then calculating the coefficients C_3 and C_4 at the locations of the poles 3 and 4 and with the calculated coefficients C_5 and C_6

and finally calculating the coefficient C_2 at the location of the pole 2 with the calculated coefficients C_3 to C_6 . The result with the pole and zero locations given above is as follows:

C_1	C_2	C_3	C_4	C_5	C_6
1	0,0657	0,00202198	3,38701E-5	4,49308E-7	1,2107E-9

5 In practice the coefficients C_1 to C_6 and the coefficients A_1 and A_2 may preferably be transformed into versions that are powers of two or summations of powers of two, in order to reduce circuit complexity.

The function of the additional pole 7 may best be explained as follows. The sigma delta modulator feed back loop will always oscillate. Assume that the digital input
 10 signal U is zero during a large number of sample periods. Then, without the pole 7, the quantizer Q will output a sequence of alternating +1 and -1 pulses. With other words: the loop oscillates at a frequency $f_s/2 = 5650$ KHz. At other input signal levels the oscillating frequency will change in order to generate different pulse patterns such as e.g. +1, +1, -1, +1, +1, -1 etc. or +1, +1, +1, -1, -1, +1, +1, -1, -1. The function of the additional pole 7 is to
 15 lower the oscillation frequency i.e. to force the sigma delta modulator to generate longer pulse patterns. For instance the idle frequency, i.e. the oscillation frequency when the input signal value is zero, may be decreased to about $8 * f_s = 352,8$ KHz; this is a factor 16 lower than the original idle frequency. The pulse pattern at zero input signal value is then sixteen +1 pulses, sixteen -1 pulses, sixteen +1 pulses etc. and, because these pulses are NRZ, this
 20 means that the power amplifier driven by the data converter has to switch about sixteen 16 times less than without the additional pole 7. The effect of pole 7 may also be illustrated with the graphs of Figs. 2 and 3 which show the amplitude versus frequency and the phase versus frequency characteristics of the transfer function of the digital low pass filter FD with and without the pole 7 in the region between $0,01 * f_s/2$ and $1 * f_s/2$. The curves I represent these
 25 characteristics without the low pass section L and the curves II represent these characteristics with the low pass filter section L. From the phase versus frequency characteristics of Fig. 3 it may be seen that the curve I passes the $-\pi$ (180°) level downwardly at $f_s/2$ while the curve II passes this level downwardly at a much lower frequency of about $0,07 * f_s/2$.

It may be noted that the poles and zeros given above are of the digital low pass
 30 filter FD. More relevant for the oscillatory behavior of the sigma delta modulator are the poles of the closed sigma delta loop itself. However, the quantizer in this loop is highly non-linear, which makes such analysis difficult. An approximation of the oscillatory behavior of

the loop may be obtained by considering the quantizer Q as a sampling-noise source and an amplifier with signal dependent amplification factor. Then the poles of the closed loop shift from the poles of the low pass filter (at low amplification factor) either to the zeros of the low pass filter or to outside the unit circle of the z -plane (at high amplification factor). Then the

5 sigma delta modulator will oscillate at approximately the frequency corresponding with the intersection of the trajectory of such shifting pole with the unit circle. Such trajectory, usually called the “root locus”, may be established and analyzed with for example the ©MatLab tool.

CLAIMS:

EPO - DG
18.10.2002
(108)

1. A data converter comprising a sigma delta modulator intended to operate at a specific sample frequency (f_s) said sigma delta modulator comprising in a feedback loop a comparator (G), a time-discrete low pass filter (FD) and a quantizer (Q) in that order, in which the comparator (G) is arranged to compare the output of the quantizer with the input
5 signal (U) to be converted, characterized in that, for decreasing the idle oscillation frequency of the sigma delta modulator, the time-discrete low pass filter is arranged to have a 180° phase delay with positive group delay at a frequency that is at least four times lower than the sample frequency (f_s).

10 2. A data converter as claimed in claim 1 characterized in that the transfer function of the time-discrete low pass filter (FD) comprises, in its complex z-plane, a plurality of poles at or close to the point (1;0) of the unit circle of said plane and an additional pole on the positive real axis of said plane at a value between 0,20 and 0,92 for decreasing the idle oscillation frequency of the sigma delta modulator.

15 3. A data converter as claimed in claim 2 characterized in that the transfer function of the time-discrete low pass filter (FD) has a number of poles that exceeds the number of zeros of said time-discrete low pass filter by at least 2.

20 4. A data converter as claimed in claim 3 characterized in that the time-discrete low pass filter (FD) comprises a cascade of integrators (I_1 to I_6), summing means (AD) to sum the output of said integrators through coefficient multipliers (C_1 to C_6) to constitute the output of the time-discrete low pass filter and a single order low pass filter section (L) positioned in series with the first of the integrators of said cascade for producing said
25 additional pole on the real axis of the complex z-plane.

ABSTRACT:

EPO - DG
18.10.2002

(108)

A data converter comprises a time-discrete sigma delta modulator e.g. for driving a Class D power amplifier. The low pass filter of the sigma delta modulator is modified by adding a suitable positioned pole to lower the oscillation frequency (limit cycle) of the sigma delta modulator in order to obtain increased clustering of the pulses applied to the output of the data converter.

Fig. 1

1/2

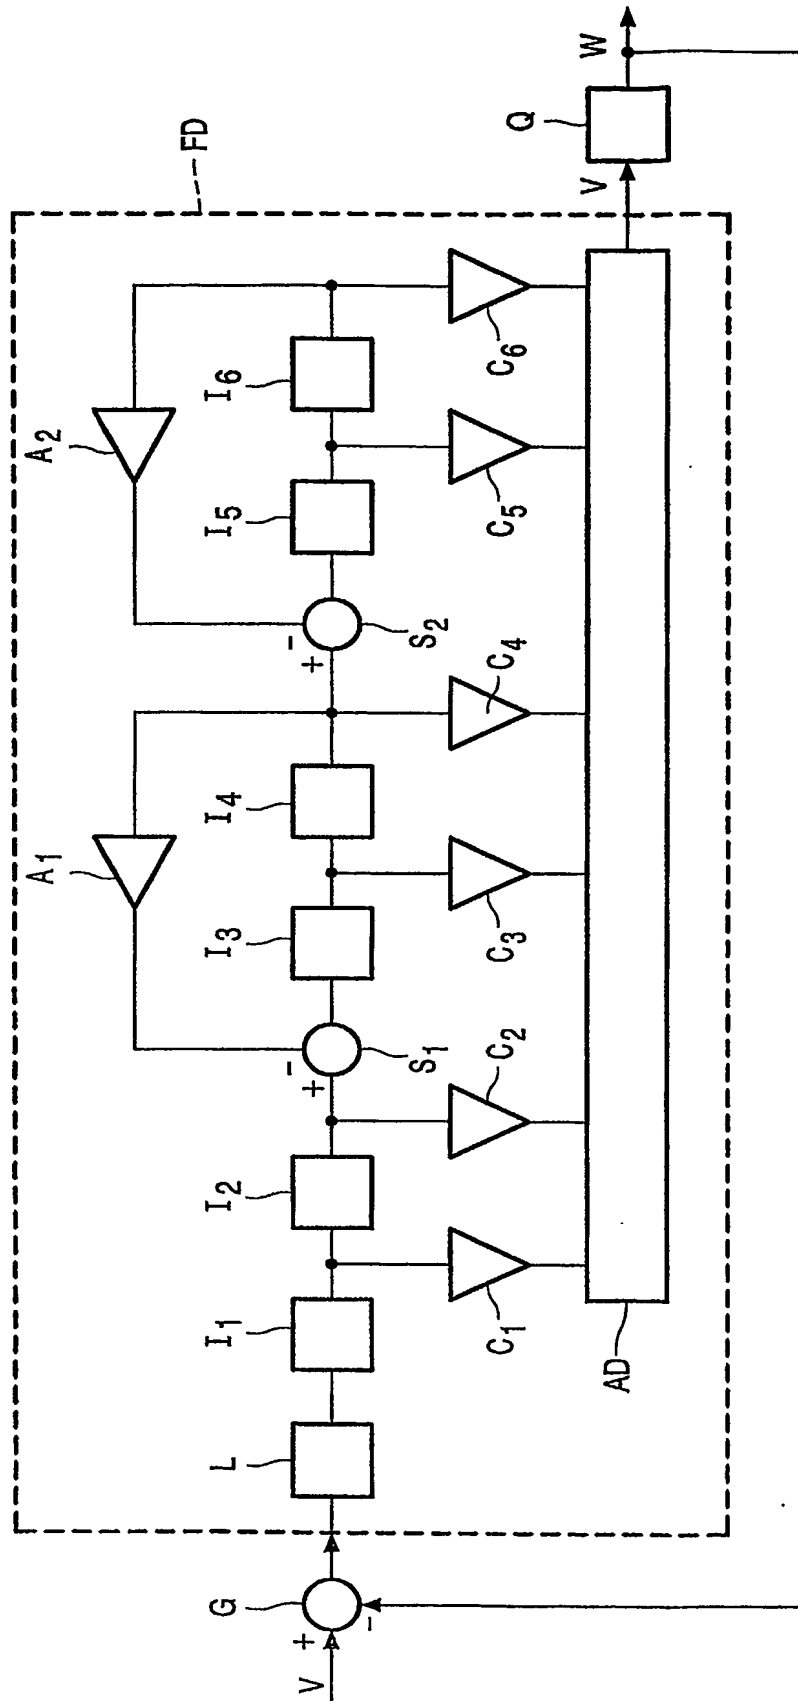


FIG. 1

EPO - DG
18. 10. 2002
(108)

2/2

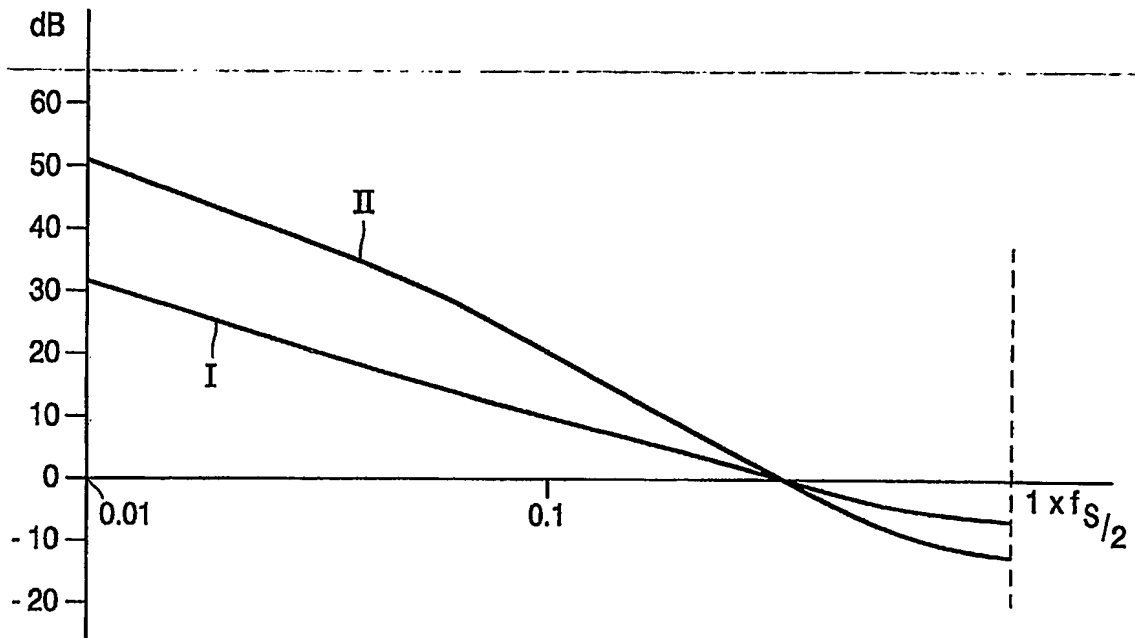


FIG. 2

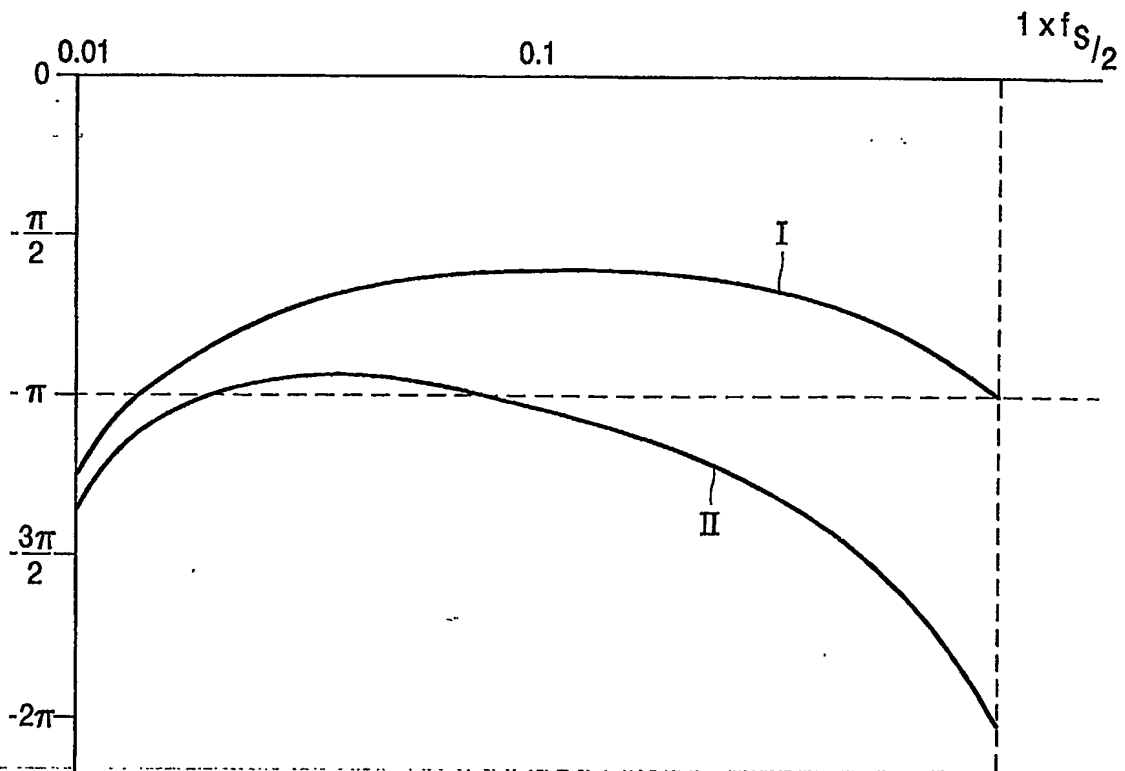


FIG. 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.